



Environmental Piece of Equipment
Hydrocarbon Bulk Storage
Above Ground Storage Tanks
Monitor Storm Water for Sheen

Serves:

External Floating Roof Tanks, Roof Drain
Dike Outfalls
Contact Water Tanks
Well Heads

Sizing:

Based upon Flange at discharge
Standard Sizes include:
4" – EE DGS EFRT040601
6" – EE DGS EFRT060801
custom configurations available

Advantages:



- Protect the Environment
- Automate roof drainage procedures
- Constant draining of storm water
- Reduce loss of product
- Demonstrate Environmental responsibility

(713) 627-1700

Fax: (713) 621-9292

sales@enviroeye.net

www.enviroeye.net

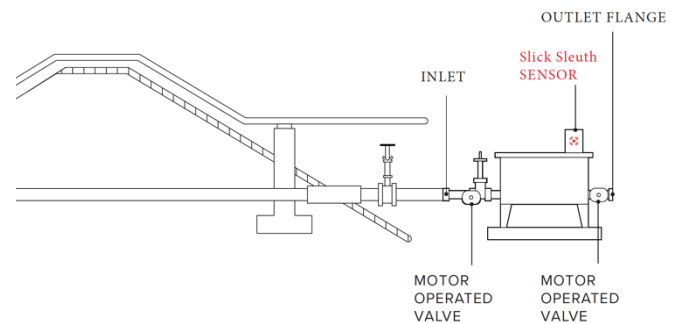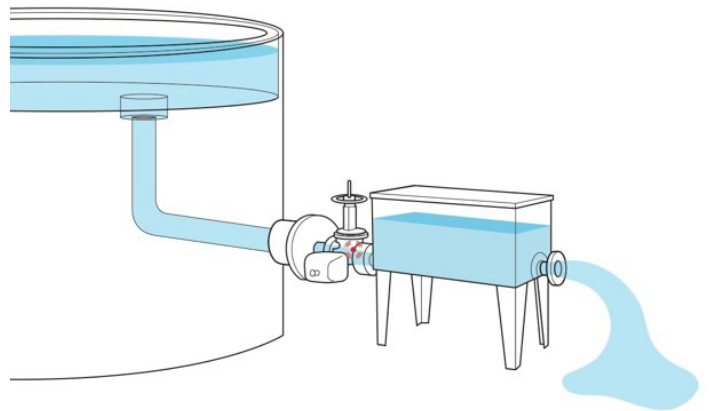



Description:

The EnviroEye Drain Guard System (EE DGS Patent 2020) monitors storm water for sheen and attaches by flange without taking a tank out of service. The DGS works to prevent any unintentional release of hydrocarbons associated with storm water. The DGS can signal valves and pumps to activate while also deploying audible & visual alerts, text messages, or control room communications. The DGS simplifies operation protocols by automatically detecting product release and possible environmental contaminations, while reducing the guesswork related to storm water and storage tank management. The EE DGS can be installed without taking a tank out of service.

Options:

- **Will match your AVML**
- **C1d1 rated**
- **Bypass Manifold**
- **Flow Indicator**
- **Cold Weather Package**
- **Secondary MOV**
- **Beacon – Visual Alert**
- **Horn – Audible Alert**
- **Control Rooms Options**
- **Slick Sleuth Sensor**
- **Leave your Valve open for constant draining**
- **Automate**
- **Keep operators out of inclement weather**
- **Environmental Piece of Equipment**
- **Reduce Site Contamination**
- **Routine PM schedule**
- **Text Message Notification**